

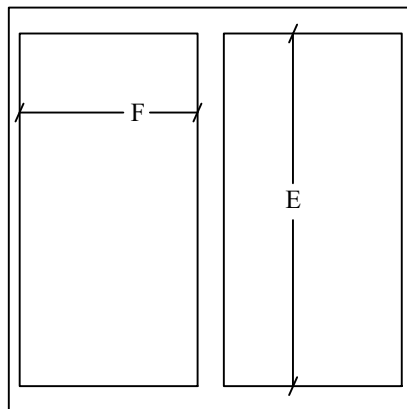
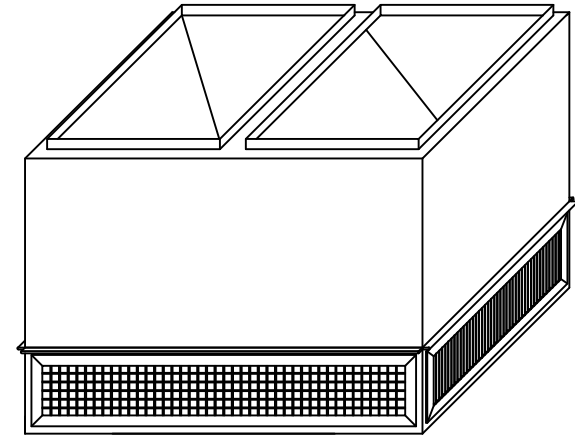
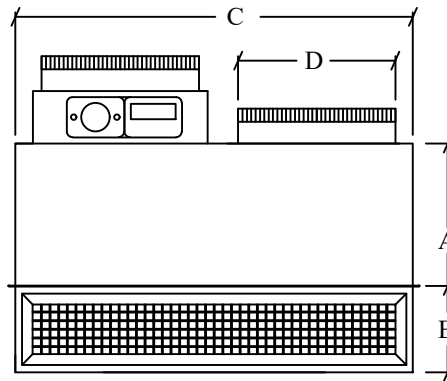


THREE - WAY THROW

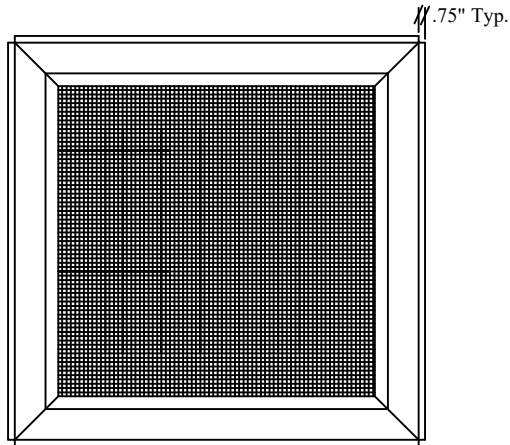

TYPICAL HARD DUCT CONNECTION

OR

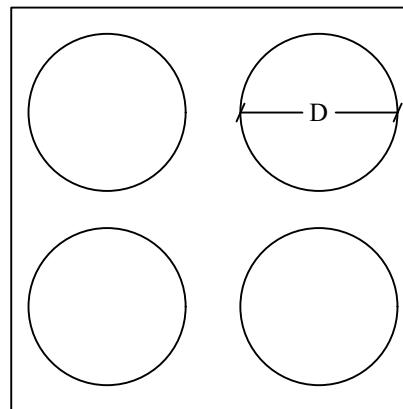

TYPICAL FLEX DUCT CONNECTION

STANDARD ITEMS:
1: 2" THICK R-8 INTERNAL INSULATION
2: HANGING BRACKETS
3: PAINTED FACE (WHITE)


OPTIONS:
☐ 1: RECTANGLE HARD DUCT CONNECTION
☐ 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
☐ 3: RETURN AIR DUCT SMOKE DETECTOR
☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
☐ 5: CLOSED CELL INSULATION
☐ 6: STAINLESS STEEL CONSTRUCTION
☐ 7: CUSTOM DUCT INLET SIZE _____

MODEL#	A	B	C	D	E	F	RETURN*	SUPPLY*	CFM RANGE	NC	THROW#
RA34-3W	12.0"	7.0"	34.0"	14"	30.0"	13.0"	26"X26"	30"X 4"	1,000 - 2,250	17 - 38	24 - 53
RA40-3W	14.0"	9.0"	40.0"	16"	36.0"	16.0"	30"X30"	36"X 5"	1,500 - 3,375	18 - 40	24 - 53
RA46-3W	16.5"	10.0"	46.0"	18"	40.0"	18.0"	34"X34"	42"X 6"	2,100 - 4,725	20 - 42	24 - 53
RA52-3W	19.0"	11.0"	52.0"	20"	46.0"	20.0"	38"X38"	48"X 7"	2,800 - 6,300	21 - 43	27 - 53

*THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM
*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

 EP CUSTOM PRODUCTS <small>ENDLESS POSSIBILITIES</small>	RIGHT ANGLE CONCENTRIC DIFFUSER MODELS RA34-52 3-WAY THROW
	SUBMITTED TO:
	<small>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.</small>
DATE: 10-29-18	
REVISION #: 1	