

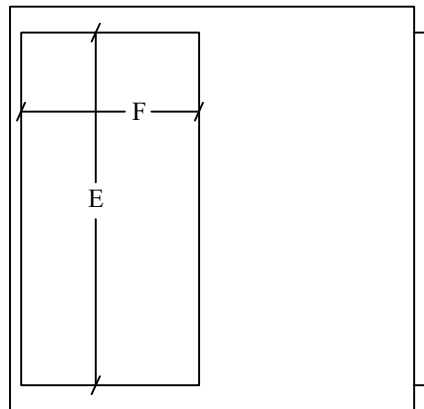
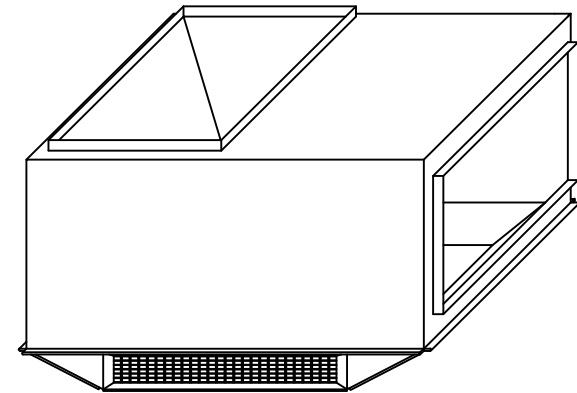
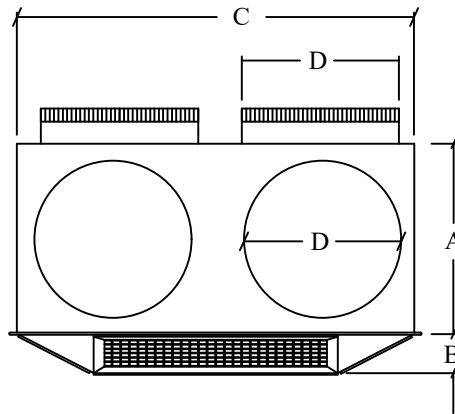


SIDE INLET SUPPLY FOUR - WAY THROW

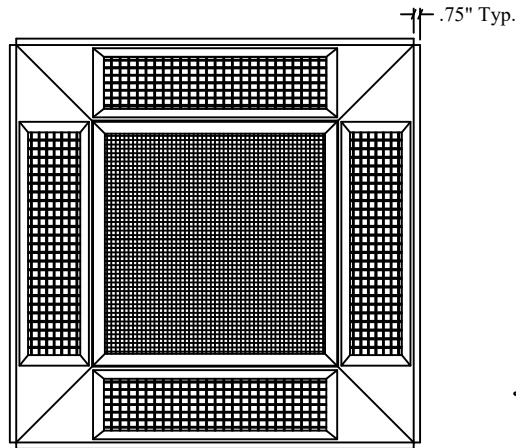

TYPICAL HARD DUCT CONNECTION

OR

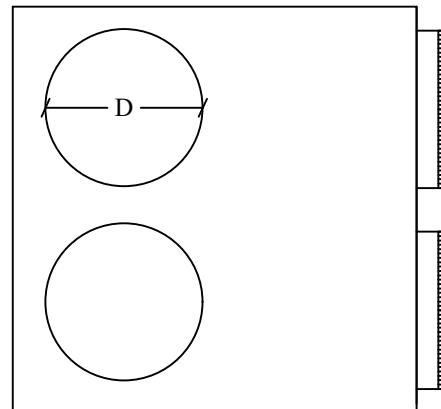

TYPICAL FLEX DUCT CONNECTION

STANDARD ITEMS:
1: 2" THICK R-8 INTERNAL INSULATION
2: HANGING BRACKETS
3: PAINTED FACE (WHITE)


OPTIONS:
☐ 1: RECTANGLE HARD DUCT CONNECTION
☐ 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
☐ 3: RETURN AIR DUCT SMOKE DETECTOR
☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
☐ 5: CLOSED CELL INSULATION
☐ 6: STAINLESS STEEL CONSTRUCTION
☐ 7: CUSTOM DUCT INLET SIZE _____

MODEL#	A	B	C	D	E	F	RETURN*	SUPPLY*	CFM RANGE	NC	THROW#
AF34-SS	16.5"	3.5"	34.0"	14"	30.0"	13.0"	18"X18"	18"X 5"	1,000 - 2,400	13 - 31	24 - 57
AF40-SS	19.0"	4.0"	40.0"	16"	36.0"	16.0"	22"X22"	22"X 6"	1,500 - 3,500	14 - 29	24 - 53
AF46-SS	22.0"	4.5"	46.0"	18"	40.0"	18.0"	26"X26"	26"X 7"	2,300 - 5,200	17 - 35	24 - 53
AF52-SS	25.0"	5.0"	52.0"	20"	46.0"	20.0"	30"X30"	30"X 8"	3,000 - 6,000	18 - 32	27 - 53

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM
*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

		ANGLED FACE CONCENTRIC DIFFUSER MODELS AF34-52 SIDE SUPPLY	
		SUBMITTED TO:	
DATE: 11-5-18		Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.	
REVISION #: 2			