

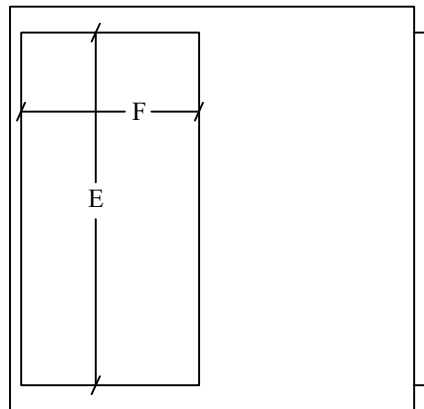
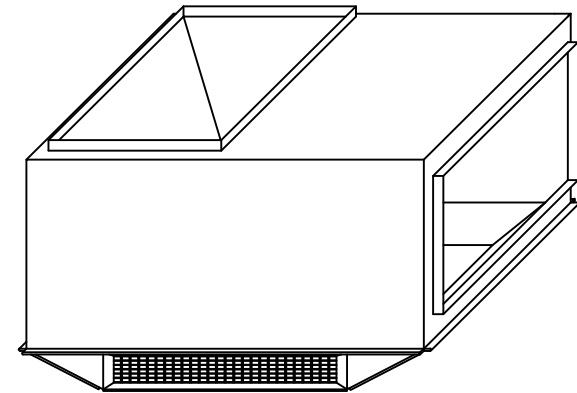
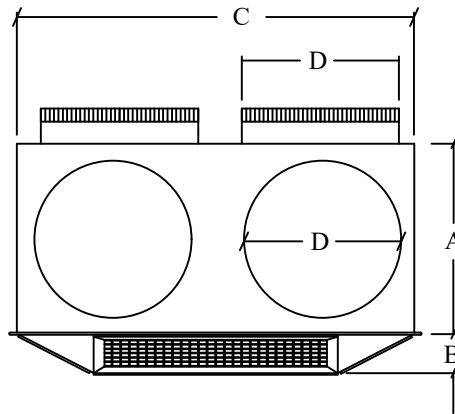


SIDE INLET SUPPLY FOUR - WAY THROW

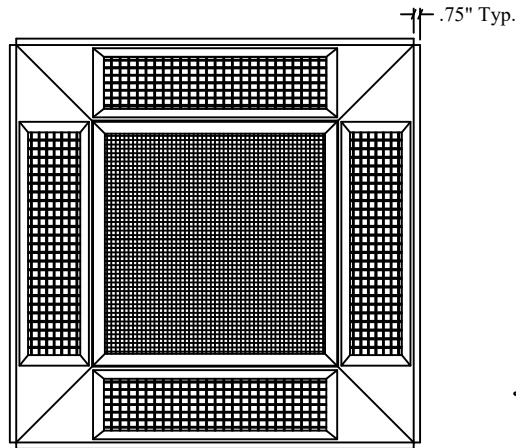

TYPICAL HARD DUCT CONNECTION

OR

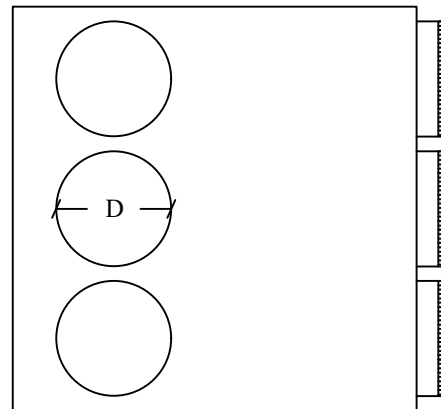

TYPICAL FLEX DUCT CONNECTION

STANDARD ITEMS:
1: 2" THICK R-8 INTERNAL INSULATION
2: HANGING BRACKETS
3: PAINTED FACE (WHITE)

OPTIONS:
☐ 1: RECTANGLE HARD DUCT CONNECTION
☐ 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
☐ 3: RETURN AIR DUCT SMOKE DETECTOR
☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
☐ 5: CLOSED CELL INSULATION
☐ 6: STAINLESS STEEL CONSTRUCTION
☐ 7: CUSTOM DUCT INLET SIZE _____

MODEL#	A	B	C	D	E	F	RETURN*	SUPPLY*	CFM RANGE	NC	THROW#
AF58-SS	28.0"	5.5"	58.0"	18"	50.0"	22.0"	34"X34"	34"X 9"	4,700 - 8,000	24 - 36	30 - 53
AF64-SS	28.0"	6.0"	64.0"	20"	56.0"	25.0"	38"X38"	38"X 10"	6,300 - 10,500	24 - 36	36 - 53
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM
*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

		ANGLED FACE CONCENTRIC DIFFUSER MODELS AF58-64 SIDE SUPPLY	
		SUBMITTED TO:	
DATE: 11-5-18 REVISION #: 2		Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.	