

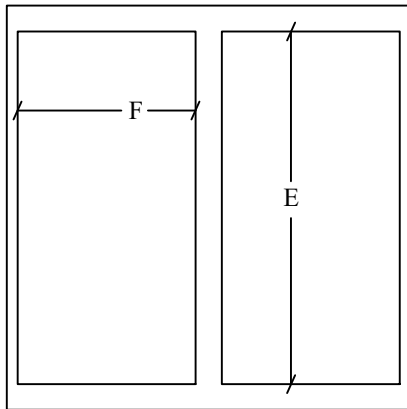
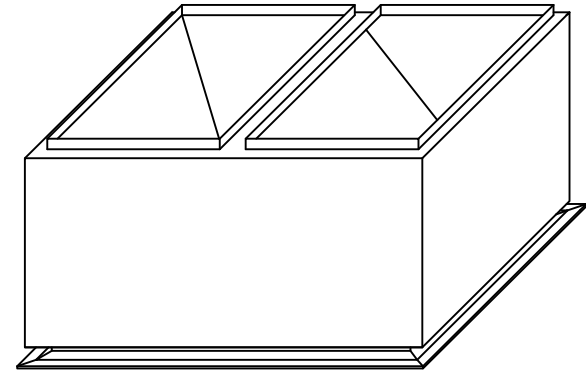
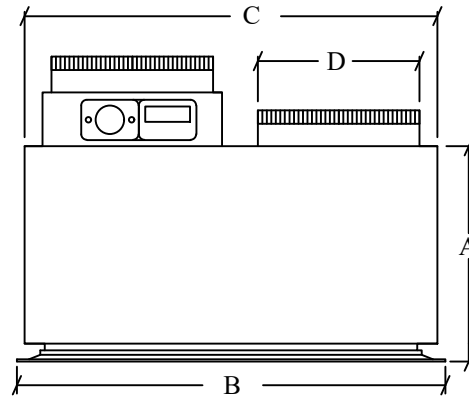


# FOUR - WAY THROW

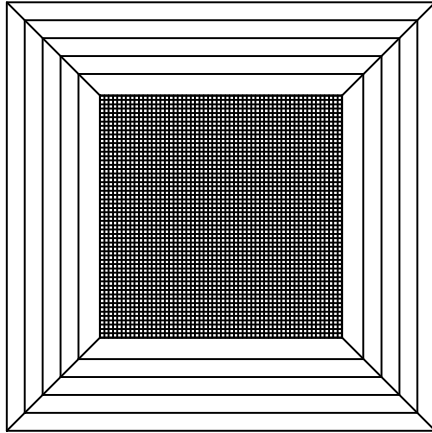

TYPICAL HARD DUCT CONNECTION

OR

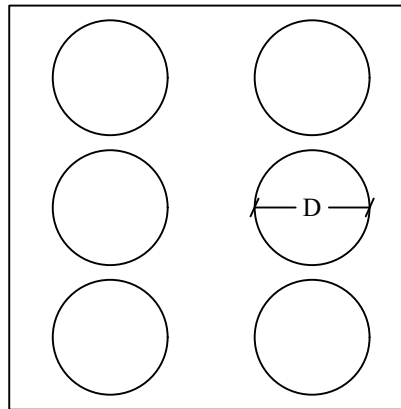

TYPICAL FLEX DUCT CONNECTION

## STANDARD ITEMS:

- 1: 2" THICK R-8 INTERNAL INSULATION
- 2: HANGING BRACKETS
- 3: PAINTED FACE ( WHITE )

## OPTIONS:


- ☐ 1: RECTANGLE HARD DUCT CONNECTION
- ☐ 2: ROUND FLEX DUCT COLLARS ( 4.5" TALL )
- ☐ 3: RETURN AIR DUCT SMOKE DETECTOR
- ☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
- ☐ 5: CLOSED CELL INSULATION
- ☐ 6: STAINLESS STEEL CONSTRUCTION
- ☐ 7: CUSTOM DUCT INLET SIZE \_\_\_\_\_

MODEL#	A	B	C	D	E	F	RETURN*	CFM RANGE	NC	MIN THROW#	MAX THROW#
FM58	27.0"	59.75"	58.0"	18"	50.0"	22.0"	39"X39"	3,880 - 7,760	17 - 27	16 - 24	35 - 55
FM64	29.0"	65.75"	64.0"	20"	56.0"	25.0"	45"X45"	4,375 - 8,750	17 - 25	18 - 28	37 - 56
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM AND 50 FPM  
\*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

[www.epcustomproducts.com](http://www.epcustomproducts.com)

 <b>EP CUSTOM PRODUCTS</b> <small>ENDLESS POSSIBILITIES</small>	<b>FLUSH MOUNT CONCENTRIC DIFFUSER</b> <b>MODELS FM58-64 4-WAY THROW</b>
	<b>SUBMITTED TO:</b>
	<small>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.</small>
<b>DATE:</b> 11-05-18 <b>REVISION #:</b> 5	