

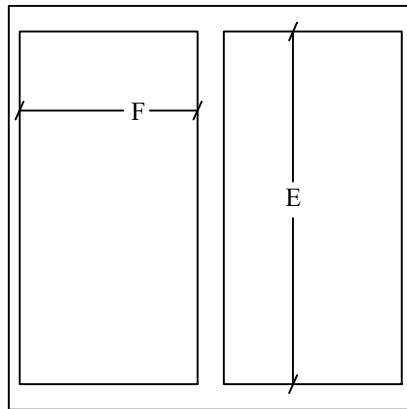
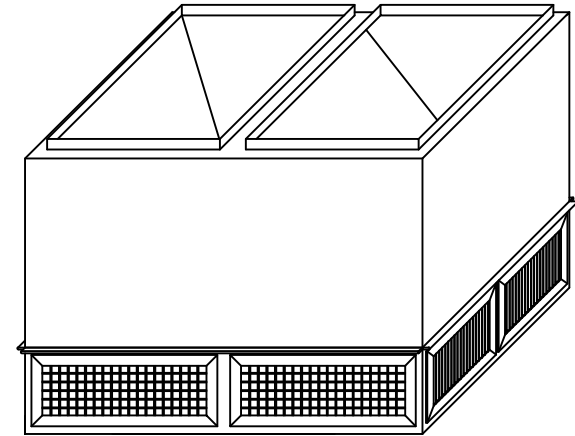
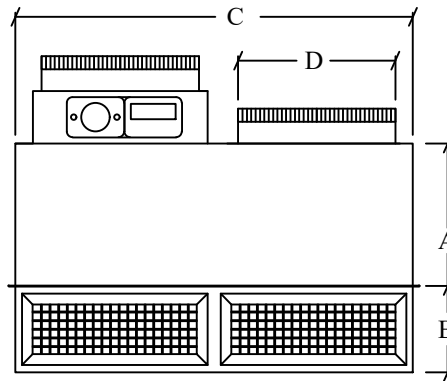


FOUR - WAY THROW

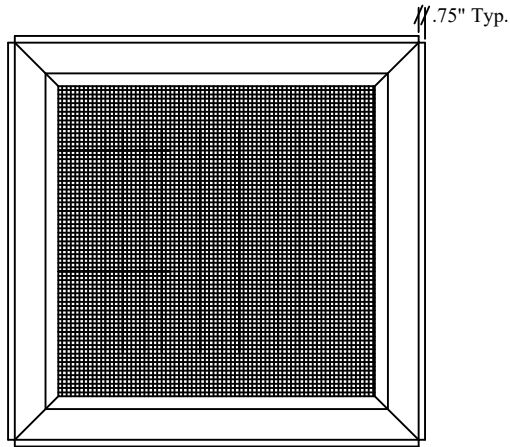

TYPICAL HARD DUCT CONNECTION

OR

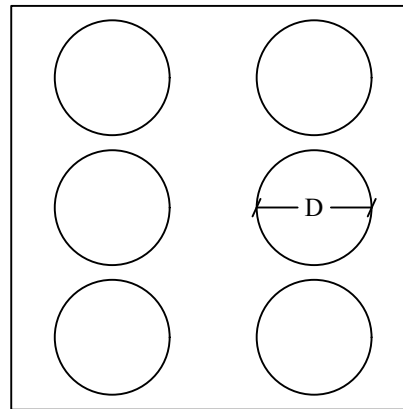

TYPICAL FLEX DUCT CONNECTION

STANDARD ITEMS:
1: 2" THICK R-8 INTERNAL INSULATION
2: HANGING BRACKETS
3: PAINTED FACE (WHITE)


OPTIONS:
☐ 1: RECTANGLE HARD DUCT CONNECTION
☐ 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
☐ 3: RETURN AIR DUCT SMOKE DETECTOR
☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
☐ 5: CLOSED CELL INSULATION
☐ 6: STAINLESS STEEL CONSTRUCTION
☐ 7: CUSTOM DUCT INLET SIZE _____

MODEL#	A	B	C	D	E	F	RETURN*	SUPPLY*	CFM RANGE	NC	THROW#
RA58	21.5"	12.0"	58.0"	18"	50.0"	22.0"	42"X42"	24"X 8"	6,800 - 10,000	15 - 29	30 - 41
RA64	22.0"	12.0"	64.0"	20"	56.0"	25.0"	46"X46"	28"X 8"	7,600 - 13,400	18 - 35	31 - 51
RA70	20.5"	14.0"	70.0"	-	64.0"	28.0"	48"X48"	30"X 10"	10,000 - 16,000	18 - 32	36 - 53
RA76	31.0"	16.0"	76.0"	-	64.0"	30.0"	48"X48"	32"X 12"	13,600 - 20,000	20 - 31	41 - 53

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM
*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

	RIGHT ANGLE CONCENTRIC DIFFUSER MODELS RA58-76 4-WAY THROW
	SUBMITTED TO:
	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.
DATE: 11-01-19	
REVISION #: 3	