

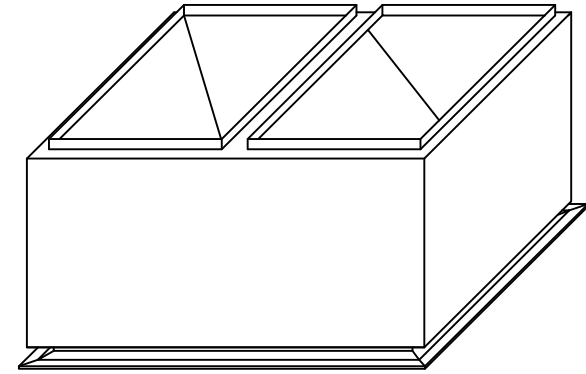
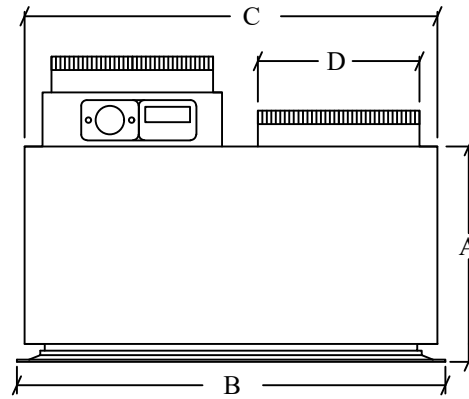


FOUR - WAY THROW

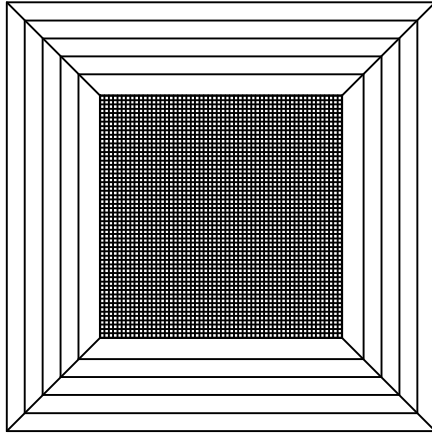


SIZE	G
58	8.25"
64	9.0"
-	-
-	-

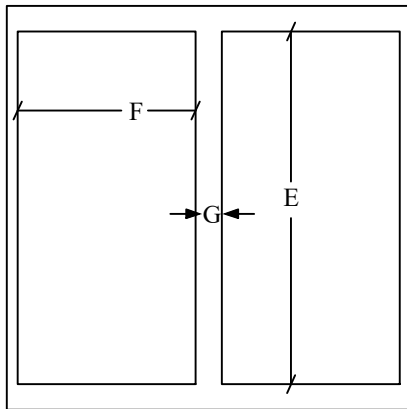

TYPICAL HARD DUCT CONNECTION

OR

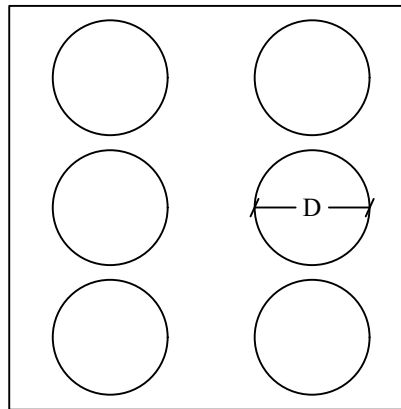

TYPICAL FLEX DUCT CONNECTION

STANDARD ITEMS:
 1: 2" THICK R-8 INTERNAL INSULATION
 2: HANGING BRACKETS
 3: PAINTED FACE (WHITE)


OPTIONS:
☐ 1: RECTANGLE HARD DUCT CONNECTION
☐ 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
☐ 3: RETURN AIR DUCT SMOKE DETECTOR
☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
☐ 5: CLOSED CELL INSULATION
☐ 6: STAINLESS STEEL CONSTRUCTION
☐ 7: CUSTOM DUCT INLET SIZE _____

MODEL#	A	B	C	D	E	F	RETURN*	CFM RANGE	NC	MIN THROW#	MAX THROW#
FM58	27.0"	59.75"	58.0"	18"	50.0"	22.0"	39"X39"	3,880 - 7,760	17 - 27	16 - 24	35 - 55
FM64	29.0"	65.75"	64.0"	20"	56.0"	25.0"	45"X45"	4,375 - 8,750	17 - 25	18 - 28	37 - 56
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM AND 50 FPM
 *GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

 EP CUSTOM PRODUCTS ENDLESS POSSIBILITIES	FLUSH MOUNT CONCENTRIC DIFFUSER MODELS FM58-64 4-WAY THROW
	SUBMITTED TO:
	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2022.
DATE: 12-27-22 REVISION #: 5	