



DOUBLE DEFLECTION DROP BOX DUCT PACKAGE (ANY RTU)

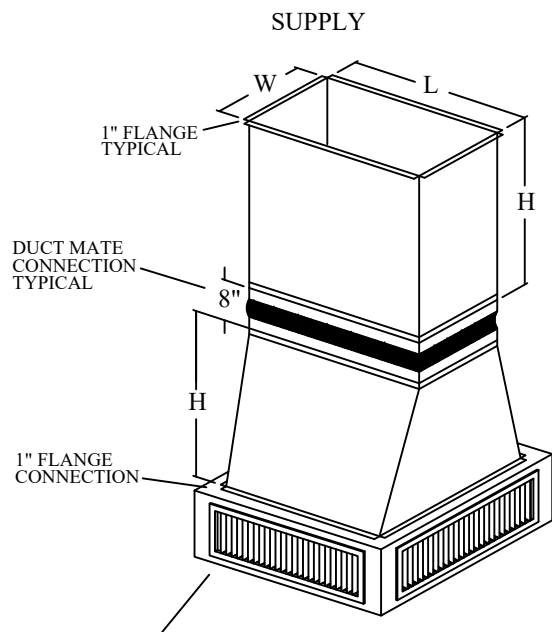

*NOTE: SEE DROP BOX SIZES
NOTED BELOW

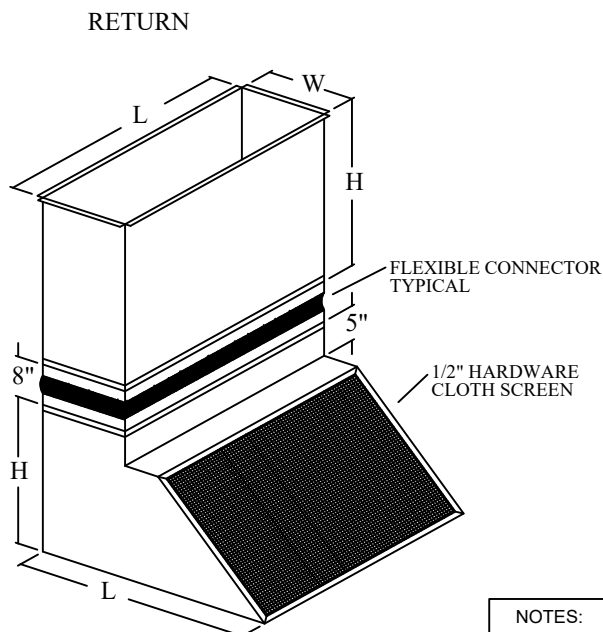

STANDARD ITEMS:
1: 1" THICK INTERNAL INSULATION
2: TDC TYPE DUCT CONNECTIONS
3: GALVANIZED STEEL CONSTRUCTION
4: DROP BOX INCLUDED

OPTIONS:
☐ 1: DELETE CANVAS CONNECTOR
☐ 2: 2" THICK INTERNAL INSULATION
☐ 3: SLIP AND DRIVE CONNECTIONS
☐ 4: TWO, THREE, SIX, AND EIGHT WAY THROW

REQUIRED ITEMS:
CUSTOMER TO PROVIDE THE FOLLOWING:
1: SUPPLY DUCT OPENING SIZE
2: RETURN DUCT OPENING SIZE
3: TOTAL DUCT LENGTHS
4: REQUIRED DROP BOX AND NOMINAL CFM

NOTES:


1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
R4WAY-1	26.0"	9.5"	20.0"	18 X 5	1,000 - 2,500	11 - 29	14-20-30	27-33-47
R4WAY-2	30.0"	10.5"	24.0"	22 X 6	1,800 - 3,500	14 - 31	20-28-39	32-40-56
R4WAY-3	34.0"	11.5"	28.0"	26 X 7	2,500 - 5,000	15 - 34	24-33-46	39-46-66
R4WAY-4	38.0"	12.5"	32.0"	30 X 8	3,500 - 7,000	16 - 35	28-39-55	46-55-79
R4WAY-5	38.0"	16.5"	32.0"	30 X 12	5,500 - 9,500	18 - 30	34-48-68	51-62-88
R4WAY-6	44.0"	16.5"	38.0"	36 X 12	6,600 - 11,000	19 - 31	38-53-75	56-68-96
R4WAY-7	44.0"	20.5"	38.0"	36 X 16	9,000 - 15,000	20 - 32	44-62-87	65-80-113

#THROW DISTANCE IN FEET

DEFLECTION	NC	THROWS	PT
15 DEGREES	+ 4	X .85	X 1.2
30 DEGREES	+ 8	X .69	X 1.8

www.epcustomproducts.com

 <p>EP CUSTOM PRODUCTS ENDLESS POSSIBILITIES</p>	DOUBLE DEFLECTION DROP BOX MODELS 4WAY-1 THRU 4AYW-7 FOUR-WAY THROW
	SUBMITTED TO:
	<p>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.</p>
DATE: 11-26-18	
REVISION #: 2	

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745