

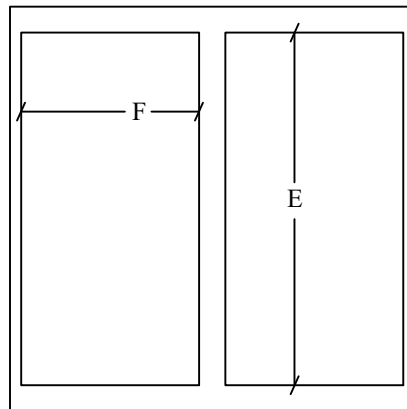
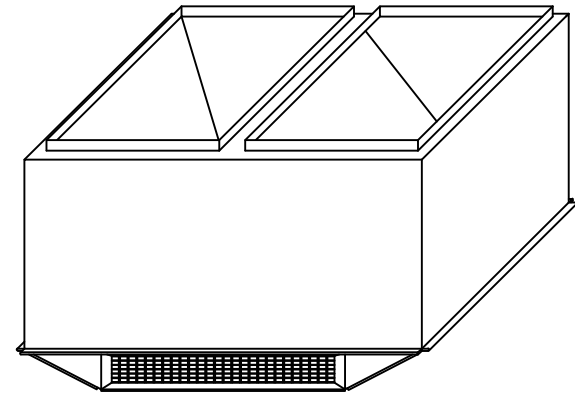
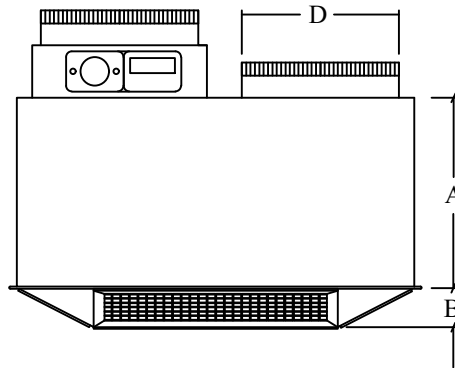


# FOUR - WAY THROW

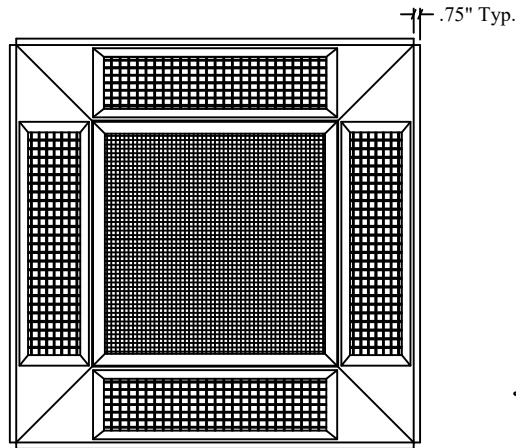

TYPICAL HARD DUCT CONNECTION

OR

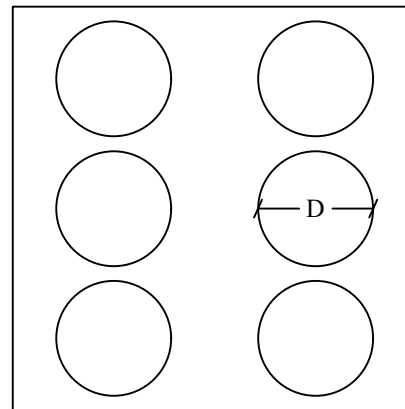

TYPICAL FLEX DUCT CONNECTION

## STANDARD ITEMS:

- 1: 2" THICK R-8 INTERNAL INSULATION
- 2: HANGING BRACKETS
- 3: PAINTED FACE ( WHITE )

## OPTIONS:


- ☐ 1: RECTANGLE HARD DUCT CONNECTION
- ☐ 2: ROUND FLEX DUCT COLLARS ( 4.5" TALL )
- ☐ 3: RETURN AIR DUCT SMOKE DETECTOR
- ☐ 4: SUPPLY AIR DUCT SMOKE DETECTOR
- ☐ 5: CLOSED CELL INSULATION
- ☐ 6: STAINLESS STEEL CONSTRUCTION
- ☐ 7: CUSTOM DUCT INLET SIZE \_\_\_\_\_

MODEL#	A	B	C	D	E	F	RETURN*	SUPPLY*	CFM RANGE	NC	THROW#
AF58	28.0"	5.5"	58.0"	18"	50.0"	22.0"	34"X34"	34"X 9"	4,700 - 8,000	24 - 36	30 - 53
AF64	28.0"	6.0"	64.0"	20"	56.0"	25.0"	38"X38"	38"X 10"	6,300 - 10,500	24 - 36	36 - 53
AF70	28.0"	6.5"	70.0"	-	64.0"	28.0"	42"X42"	42"X 11"	7,000 - 12,600	23 - 36	30 - 53
AF76	30.0"	7.0"	76.0"	-	64.0"	30.0"	46"X46"	46"X 12"	9,200 - 15,300	26 - 38	30 - 59

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150 FPM  
\*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

 <b>EP CUSTOM PRODUCTS</b> <small>ENDLESS POSSIBILITIES</small>	ANGLED FACE CONCENTRIC DIFFUSER MODELS AF58-76
	SUBMITTED TO:
	<small>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.</small>
DATE: 10-23-18	
REVISION #: 7	