

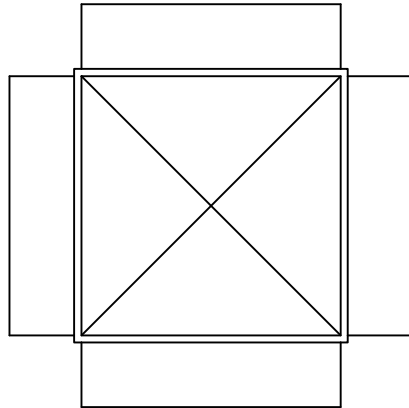


# FOUR - WAY THROW

TOP VIEW

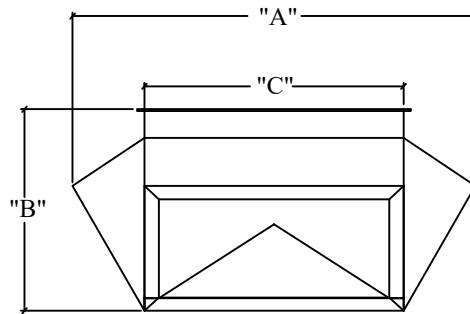

SIDE VIEW

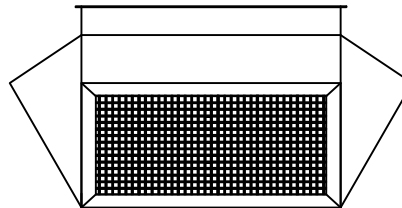

## STANDARD ITEMS:

- 1: 2" THICK R-8 INTERNAL INSULATION
- 2: TDC TYPE DUCT CONNECTION
- 3: GALVANIZED STEEL CONSTRUCTION ( DROP BOX )
- 4: ALUMINUM DOUBLE DEFLECTION GRILLES ( WHITE )

## OPTIONS:

- ☐ 1: DROP BOX PAINTED WHITE
- ☐ 2: OPPOSED BLADE DAMPERS
- ☐ 3: CLOSED CELL INSULATION
- ☐ 4: DELETE INSULATION
- ☐ 5: DOUBLE DEFLECTION GRILLES ( MILL FINISH )
- ☐ 6: STAINLESS STEEL CONSTRUCTION

## NOTES:


- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
SF4W-8	58.0"	26.25"	38.0"	36 X 18	10,000 - 18,000	23 - 40	58-75-106	81-100-140
SF4W-9	64.0"	26.25"	44.0"	42 X 18	12,000 - 23,500	21 - 38	52-72-102	84-103-146
SF4W-10	72.0"	31.00"	48.0"	46 X 22	16,000 - 29,000	23 - 37	59-82-116	93-111-158
SF4W-11	76.0"	33.25"	50.0"	48 X 24	21,000 - 33,500	26 - 39	73-95-134	98-120-169
SF4W-12	94.0"	33.25"	68.0"	32 X 24*	24,000 - 41,000	21 - 33	57-80-113	85-104-147
SF4W-13	98.0"	37.75"	68.0"	32 X 28*	33,000 - 52,000	24 - 38	65-84-119	87-105-150

\*USES TWO GRILLES PER SIDE  
#THROW DISTANCE IN FEET

DEFLECTION	NC	THROWS	PT
15 DEGREES	+ 4	X .85	X 1.2
30 DEGREES	+ 8	X .69	X 1.8

[www.epcustomproducts.com](http://www.epcustomproducts.com)

 <b>EP CUSTOM PRODUCTS</b> <small>ENDLESS POSSIBILITIES</small>	DOUBLE DEFLECTION DROP BOX MODELS SF4W-8 THRU SF4W-13 FOUR-WAY THROW
	SUBMITTED TO:
	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2018.
DATE: 11-23-18	
REVISION #: 2	

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745